

EuroGravel®

PLUS+

Maximum ease

the solution for a stable and rut-free gravel surface

EuroGravel PLUS brings an end to the raking of ruts and tracks in your gravel surface. Your garden furniture will no longer sink and cycling or wheelchair use is made comfortable and safe. The strong and flexible honeycomb structure is resistant to car steering and braking movements. With the right base, it therefore forms an ideal basis for car parks or driveways.




Weed-resistant

The high-quality weed control membrane (80 g/m²) protects against weed growth from below



Water permeable

The gravel grids and the weed control membrane have excellent water permeability properties



Large surface area

With a surface area of 1.15 m², the gravel grids are currently the largest single-piece gravel grids available on the market!




Larger gravel grids

The large diameter of the cells makes the gravel grid suitable for larger gravel and chipping sizes too



Quick to install

Simple to cut to size and easy to lay out



Easy to recycle

The weed control membrane and the gravel grid are made of polypropylene plastic, making the gravel grid easy to recycle

► Gravel stabilisation grids with weed control membrane for all types of gravel and chippings

EuroGravel®
innovative basis for gravel and chippings

An even and safe gravel surface under all conditions

The thermally attached weed control membrane is not just very strong, but also has a very strong adhesion to the gravel grid. This prevents gravel from falling between the membrane and the gravel grid under intensive use and keeps the gravel grids completely even at all times. In addition, the non-woven structure of the polypropylene weed control membrane prevents silting up and rotting.

Proven strong

The research institute TNO did a test that proves the EuroGravel PLUS stabilisation grids can be loaded with very high loads, with the right base.

Test	Maximum permissible load:
Empty panel	> 129 tons per square metre
Filled panel	> 11,857 tons per square metre

Freeze thaw resistant

In accordance with NEN-EN-1338, no noticeable damage. It would be advisable, however, to install and cover the product within 2 weeks of removing the shrink sleeves.



+ Very strong thermally attached weed control membrane



+ Comfortable and safe for everyone




+ Very strong and flexible honeycomb structure

EuroGravel[®] PLUS+

Specifications

Panel dimensions	120 x 100 x 3 cm
Cell diameter	49mm
Cell wall thickness	below: 2mm above: 1,2mm
Panels per m ²	0,87
M ² per panel	1,15 m ²
Weight per panel	2380 grams
Gravel/chippings consumption	approx. 75kg per m ²
Available colours	black and white
Gravel size	Min. 5mm, max. 25mm
Chipping size	Min. 5mm, max. 25mm
Weight of weed control membrane	80 g/m ²
Water permeability of weed control membrane	120 l/m ² .s (compliant with EN-ISO-11058)
Tensile strength of weed control membrane (CMD/MD)	6 kN/m (compliant with EN-ISO-10319)

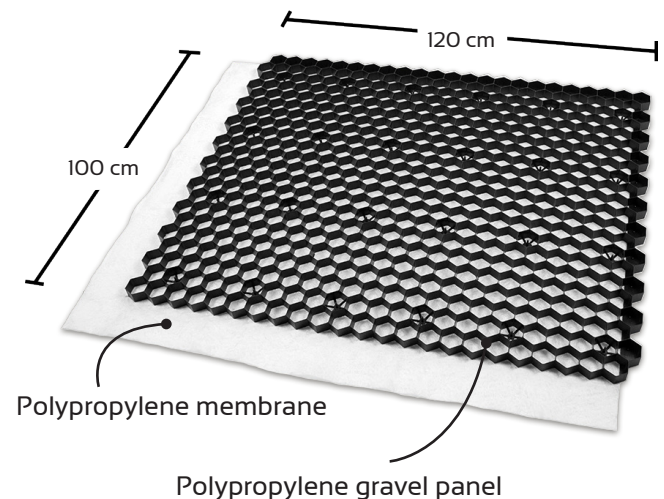

Your EuroGravel dealer:

